

GD 370-S

Glass Break Detector for Laminated Glass, Glued



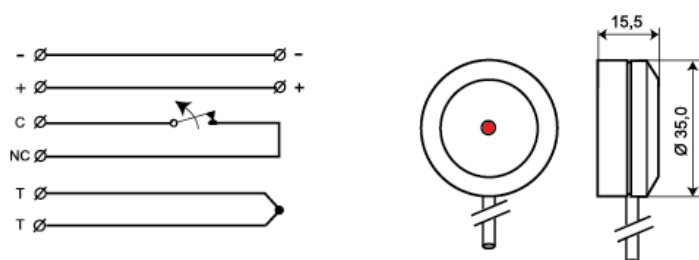
Technical data

Maximum coverage	2 m radius (standard 4-6 mm glass)
Approvals	EN 50131-2-7-2:2013 Grade 2, VdS G 110523 Class B, SBSC 10-33 Class 3
Current consumption	1,5 mA (3 mA in alarm state)
Alarm output	Relay, NC
Contact rating	50 VDC / 100 mA
Alarm indication	LED
Tamper protection	Yes
Alarm hold time	Latching
Alarm reset	Power down
Connection	Cable
Housing material	ABS Plastic
Colour	White
Housing protection class	IP 67
Dimensions (H x Ø) mm	16 x 35
Dimensions (L x W x H) mm	91 x 31 x 23



The GD 370-S has the same features as the GD 370 with relay output and can be directly connected to a control panel via the junction box JB 103-6.

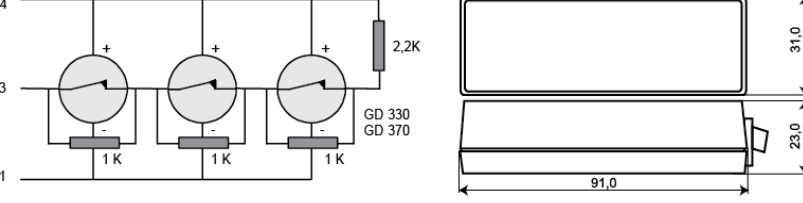
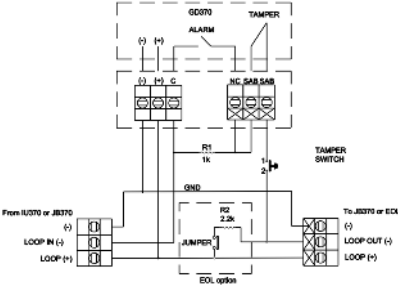
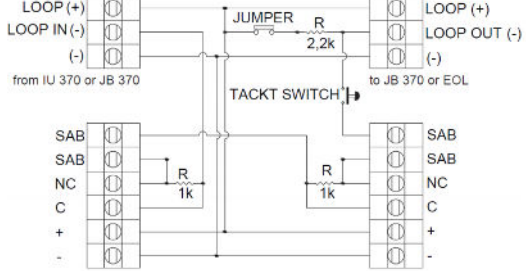
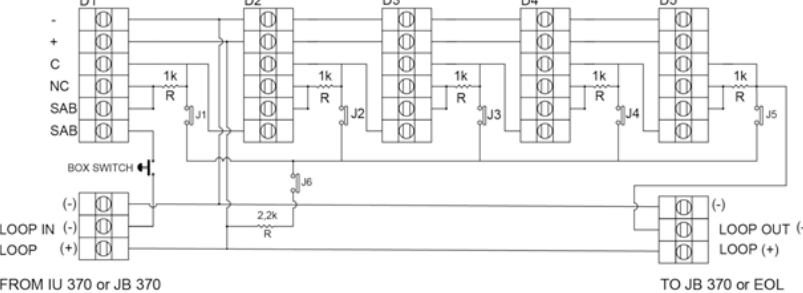
The detector has a coiled cable with a modular connector that plugs into the junction box JB 103-6, which allows it to be quickly and easily disconnected from the detector loop when, for example, cleaning windows.



ORDERING INFORMATION

Model	Description
GD 370-S	Glass break detector for laminated glass with relay output, glued, coiled cable with 6-pin modular connector plug
GD 370-SJ	Glass break detector for laminated glass with relay output, glued, coiled cable with 6-pin modular connector plug and junction box JB 103-6

Related products and accessories

	IU 370 Interface unit for GD 330/ GD 370/ GD 470	 The diagram shows a circuit with three 1K resistors connected to terminals 1, 3, and 4. A 2.2K resistor is connected to terminal 4. The unit is labeled GD 330 and GD 370. Dimensions are 91.0 mm width, 23.0 mm height, and 31.0 mm depth.
	JB 370 Junction Box for GD 370 and GD 470 Glass Break Detectors	 The diagram shows a circuit with terminals for LOOP IN (+), LOOP IN (-), LOOP (+), and LOOP (-). It includes a 2.2K resistor, a 1K resistor, and a TACKT SWITCH. The unit is labeled GD 370 and GD 470.
	JB 370-2 Junction Box for GD 370 and GD 470 Glass Break Detectors	 The diagram shows a circuit with terminals for LOOP (+), LOOP IN (-), LOOP (-), LOOP OUT (+), and LOOP OUT (-). It includes a 2.2K resistor, a 1K resistor, and a TACKT SWITCH. The unit is labeled JB 370 and EOL.
	JB 370-5 Junction Box for GD 370 Glass Break Detector	 The diagram shows a circuit with terminals for D1, D2, D3, D4, and D5. It includes 1K resistors, a 2.2K resistor, and a BOX SWITCH. The unit is labeled JB 370 and EOL.
	CG 100 Cable Conduit	

Related products and accessories

	GDK 100 Adhesive Kit	
	GVT 500 DISCONTINUED - Replaced by GVT 5000 Test unit for GD 300/GD 400 Glass Break Detectors.	
	GVT 5000 Test Unit for Glass Break and Vibration Detectors	
	JB 103-6 Junction box for GD 330-S or GD 370-S	