

DC107

Magnetkontakt med 2 meter ledning, planmont., max. gab 9mm,

Contacts

The DC107/124/125/887/888 contacts are designed specifically for use in steel doors commonly found in commercial building applications. Many models including, wide gap, CO and biased for high security applications make the series the most widely used and comprehensive line available.

Easy installation

The unique housing design features a rugged unibody construction with flexible ribbed sides for quick, secure installation without gluing. The magnet housing isolates the magnet from the surrounding steel for maximum gap distances, both make and break.



Detaljer

- Special design for steel mounting
- Also suitable for select timber frame doors
- Self-lock mounting
- Comprehensive product range
- Standard 2 m wire length
- Tamper loop provided
- Built-in resistors available to special order

DC107

Magnetkontakt med 2 meter ledning, planmont., max. gab 9mm,

Tekniske specifikationer

Generelt

Applikationstype	Forsænket montering
Kontakt type	NC
Forbindelse	4 wires, 2 m

Wired / trådløs


Wired / trådløs	Kablede
Driftsgab	9 mm (max.)

Fysisk

Dimensioner magnet	24 x 40 mm (Ø x H)
Dimensioner kontakt / sensor	24 x 29 mm (Ø x H)
Diameter	19 mm
Borehuldiameter	19.1 mm
Farve	Hvid

Regulerende

EN50131 kvalitet	Lønklasse 2
Certificatie	UL/ULC

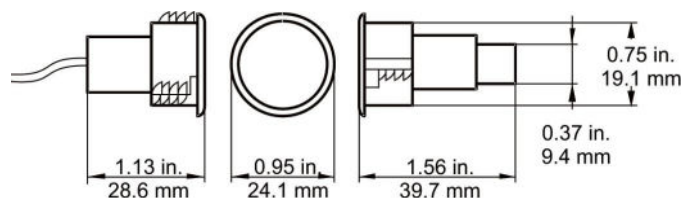

Carrier Fire & Security er et innovativt selskab og forbeholder sig ret til at ændre produktspecifikationer uden varsel. De nyeste produktspecifikationer kan du finde på dk.firesecurityproducts.com eller ved at kontakte din salgsrepræsentant hos.

Last updated on 23 April 2024 - 14:41